


MODEL LP2: Extended Reach (Double Scissor) 3-Axis Lifts

Extended reach lifts are similar in design to the standard LP2 lift, but are designed for booths or bays that are wider than normal, to accommodate large products or multiple products at the same time. Extended reach design allows the front of the platform to reach up to 14' out from the booth wall.

- Raised platform heights up to 21'
- Retracted dimension of 3'-8"
- Extended dimension 14'
- Operator platform capacity 400#
- Pneumatic/mechanical power unit
- Includes in-line Filter/Regulator/Lubricator
- Standard platform 48" wide x 21" deep
- Operator controls on front rail of platform
 - Hand controls for Y-Axis, Z-Axis, and emergency stop
 - Foot control for X-Axis
- Base control to raise and lower platform
- Auxiliary uncoiled air connection in platform
- Self-closing/self latching entry gates
- 1 and 2 axis models available
- Lift requires a clean, dry air supply of 80 SCFM @ 100 PSI with a 40°F dew point

Travel Speeds:

- X-Axis variable up to 40 FPM
- Y-Axis 15 FPM
- Z-Axis 15 FPM

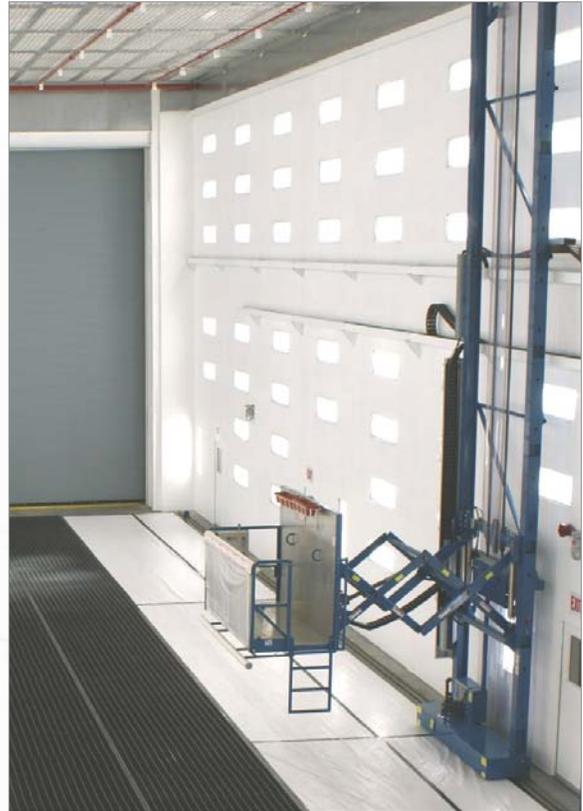

LP2-Extended Reach Fully Extended Dimension 14'				
Model	A	B	C	D
LP2-614	6'-0"	10'-3"	11'-6"	12'
LP2-714	7'-0"	11'-3"	12'-6"	13'
LP2-814	8'-0"	12'-3"	13'-6"	14'
LP2-914	9'-0"	13'-3"	14'-6"	15'
LP2-1014	10'-0"	14'-3"	15'-6"	16'
LP2-1114	11'-0"	15'-3"	16'-6"	17'
LP2-1214	12'-0"	16'-3"	17'-6"	18'
LP2-1314	13'-0"	17'-3"	18'-6"	19'
LP2-1414	14'-0"	18'-3"	19'-6"	20'
LP2-1514	15'-0"	19'-3"	20'-6"	21'
LP2-1614	16'-0"	20'-3"	21'-6"	22'
LP2-1714	17'-0"	21'-3"	22'-6"	23'
LP2-1814	18'-0"	22'-3"	23'-6"	24'
LP2-1914	19'-0"	23'-3"	24'-6"	25'
LP2-2014	20'-0"	24'-3"	25'-6"	26'
LP2-2114	21'-0"	25'-3"	26'-6"	27'

