


MODEL LPCE: 3-Axis Lifts

The Model LPCE Multi-axis lift system is a CE Marked personnel lift designed for use in paint application booths. For working from heights this system replaces ladders and ergonomically positions the operator to perform their work.

- Maximum raised platform height 5.5M
- Retracted platform dimension 1M
- Extended platform dimension 2.5M
- Operator platform capacity 202 Kg.
- Pneumatic motor & mechanical screw drives to raise and extend the operator platform provide smooth precise positioning.
- Consult LPI for equipment options
- Standard Platform 1M wide x 1M deep
- Operator controls on front rail of platform
 - Hand controls for Y-Axis, Z-Axis, and emergency stop.
 - Foot control for X-Axis
- Base control for Y-Axis, Z-Axis, and emergency stop
- Lift equipped with Filter/Regulator/Lubricator
- Auxiliary uncoiled air connection in platform
- Self-closing/self latching entry gates
- Lift requires a clean, dry air supply with a flow rate of 1.4 CMM @ 7 bars with a dew point of < 4°C

Travel Speeds:

- X-Axis travel 0.4M/sec
- Y-Axis travel 0.08M/sec
- Z-Axis travel 0.07M/sec

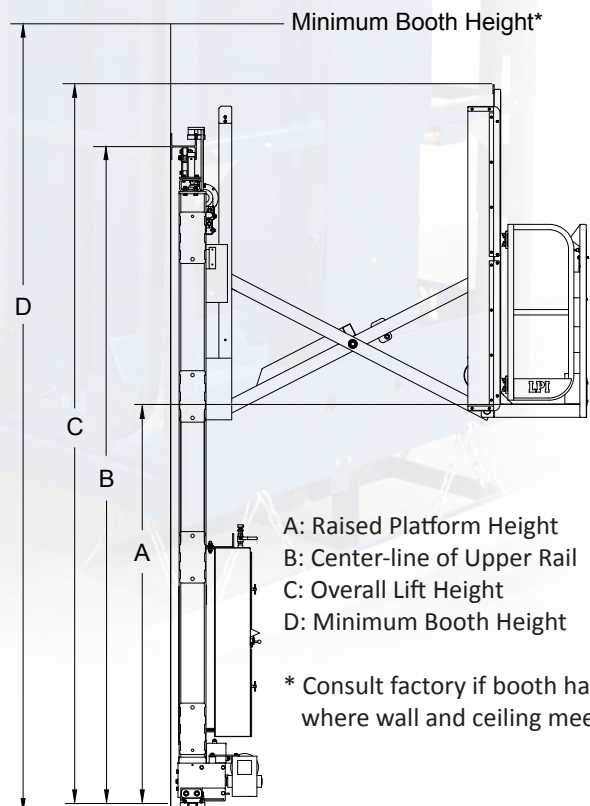

Model LPCEP Fully Extended Reach 2.5M				
Model	A	B	C	D
LPCEP-2025	2.0M	3.5M	3.9M	4.0M
LPCEP-2525	2.5M	4.0M	4.4M	4.5M
LPCEP-3025	3.0M	4.5M	4.9M	5.0M
LPCEP-3525	3.5M	5.0M	5.4M	5.5M
LPCEP-4025	4.0M	5.5M	5.9M	6.0M
LPCEP-4525	4.5M	6.0M	6.4M	6.5M
LPCEP-5025	5.0M	6.5M	6.9M	7.0M
LPCEP-5525	5.5M	7.0M	7.4M	7.5M